

Product Data Sheet

9 CF Premier Pharmacy/Vaccine Stainless Steel
Refrigerator & Freezer Combination, Left Hinged

PH-ABT-HC-RFC9SS-LH

Images



Product Description

The Premier Pharmacy Dual Temp Combination units feature separate microprocessor temperature controller allowing for precise temperature control, verification and recovery. An interior fan driven, forced-draft air circulation system provides excellent temperature uniformity and recovery after door openings. REFRIGERATORS ONLY

All models are equipped with digital temperature displays for convenient monitoring. Critical samples and supplies are security backed with an extensive package of audible and visual alarms. The freezer units feature either an automatic or manual defrost operating system. For manual defrost freezers, periodic manual defrosting is required.

This model is designed with a "front-breathing" ventilation system, eliminating the need for clearance around the top and sides of the unit; enabling the user to incorporate these units into cabinets and other applications where free space is limited.

Environmentally friendly, natural hydrocarbon (HC) refrigerants (not containing hydrofluorocarbons) vastly reduce global-warming potential (GWP) while meeting new EPA/SNAP mandates and UL, ASHRAE compliance guidelines.

Certifications



General Description and Application

Storage capacity (cu. ft)	9 Cu. Ft. Capacity (4.5 Ref./4.2 Freezer)
Door	2 stainless steel exterior swing doors, left hinged
Shelves	2 adjustable/1 fixed, refrigerator and 2 fixed, freezer
Freezer Compartments	1
Baskets	Non-applicable
Mounting	Leveling Legs and stacking kit
Interior lighting	LED interior lights
Airflow management	Forced draft air circulation, refrigerator
External probe access	Probe access port (3/4"), 2 ea. (1 for refrigerator/1 for freezer)
Insulation	High density urethane foam cabinet insulation
Exterior materials	Stainless Steel
Access Control	Keyed door lock
General warranty	Two (2) year parts and labor warranty
Compressor Parts Warranty	Five (5) year compressor parts warranty
Product Weight (lbs)	200
Shipping Weight (lbs)	269
Rated Amperage	1.74 Amps Refrigerator, 1.5 Amps Freezer
Power Plug/Power Cord	NEMA 5-15 Plug, conforms to UL471 requirements . Vaccine storage power cord warning label
Facility Electrical Requirement	110-120V AC: 15 A (minimum)
Agency Listing and Certification	UL-C-UL Listed


Refrigeration System

Refrigerant	HFC-free refrigerant (R600a)
Defrost	Manual defrost freezer / Cycle defrost refrigerator

Controller, Configuration, Alarms and Monitoring

Controller technology	Microprocess temperature controller
Calibration	Calibrated using a NIST traceable device, certificate included
Adjustable Temperature Range	Refrigerator: 36°F – 46°F (2°C -8°C); Freezer: 5°F – -13°F (-15°C - -25°C)
External alarm connection	Remote alarm contacts
Alarms	Audible and visual high and low temperature alarms
Other	Pyxis®, Omnicell® and AcuDose RX® compatible
Warranty Disclaimer	Indoor use only, +18C to +26C (+65F to +78F), <70% RH.
	Specifications are subject to change. Requires 2 outlets.
	Periodic defrosting of the freezer is required.
	This model requires 4" of clearance around back and sides of the unit for proper ventilation. Improper installation will void the warranty and will lead to temperature maintenance issues, overheating and possible failure.

Dimensions					
	Width (in.)	Depth (in.)	Height (in.)	Door Swing (in.)	Total open Depth (in.)
Exterior	23.75	24.5	67.25	23.5	46
Interior	19.25 upper / 19 lower	17.25 upper / 17.25 lower	24.5 upper / 24.5 lower		

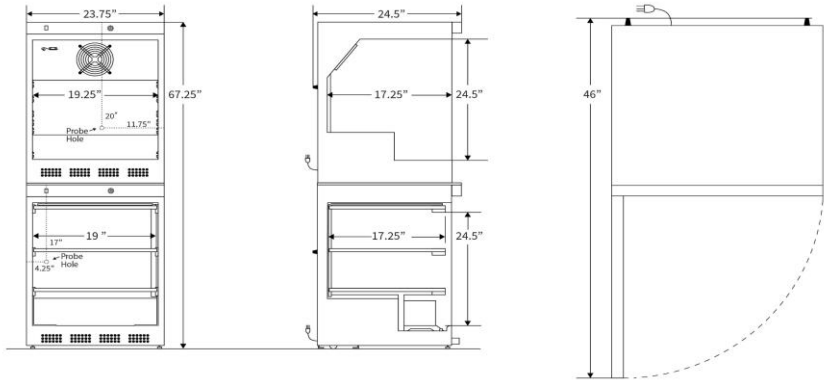

Contact		
Customer Service	800-648-4041 Option 3	customerservice@horizonscientific.com
Technical Service	800-648-4041 Option 5, Parts Option 4	technicalservice@horizonscientific.com

Rev_01202025